


Layout drawing

Machine area make room for 1 m!

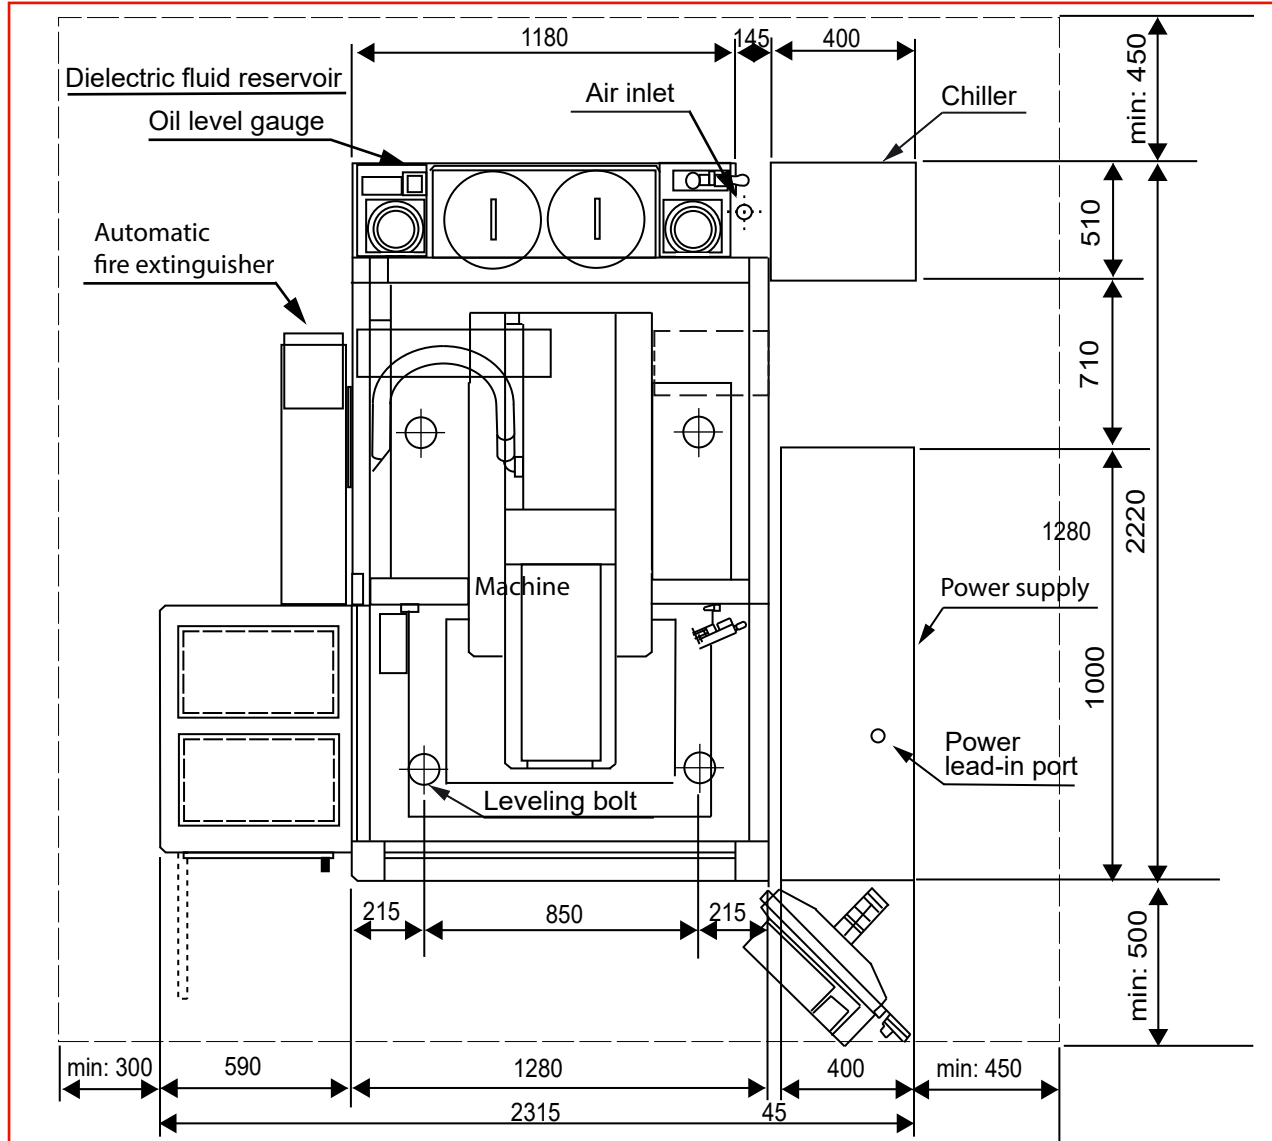

Additional information

Weight of machine body: 3.500 kg
 Weight of power supply unit: 315 kg
 Height of machine: 2.400 mm
 (with leveling bolt & exhaust. duct.)

Requested minimum measurement for entrance door/gate (WxH) with LS20T-ATC: 1.915 x 2.500 mm

1: Power supply
 3 phases 400 V / AC, PE
 ± 10%, 50/60 Hz, 20 kVA

Fuse depends on power supply
 For GV 80 P generator is 16 A recommended.
 For GV 120 P generator is 32 A recommended.

(Cable not included in delivery volume)

The electricity supply must be done through a customer-sided provided electrician due to the different regulations for each region/country.

2: Pneumatic connection: 5-7 kgf/cm³ » 500-700 kpa
 Air volume minimum: 27 l/min
 3/8" hose connection

3: For a fire extinguish installation a fixed connection in the near of the control unit is necessary. A socket is not allowed.
 1 phase AC 240 V with 10 A fuse.

4: Network connection

5: The erosion system should be set up to preferably consolidated concrete floors on a suitable hard industrial ground. To the capacity of MITSUBISHI possibly necessarily becoming shielding measures do not belong in accordance with EMV guideline.



	Datum/ Date:	Name/ Name:
gezeichnet/drawn:	10.01.2020	Y. Ucar
geprüft/checked:	18.12.2020	Y. Ucar
überarbeitet/revised:	01.02.2021	Y. Ucar